



BY APPOINTMENT TO  
THE ROYAL DANISH COURT

CARL HANSEN & SØN




PRODUCT DATA SHEET

HJW03 OPALA FLOOR LAMP MIDI

The HJW03 Opala Floor Lamp Midi was designed by Hans J. Wegner in 1973 as a part of a larger lighting series designed for Hotel Scandinavia in Copenhagen. The Opala Lighting Series presents a distinctive, almost futuristic expression with slightly tilted lampshades and straight lines. Opala Floor Lamp features an asymmetric opal acrylic shade with a painted aluminium top, radiating a pleasant, focused light, while softly illuminating the surrounding space through the lampshade. Suitable for the living room and lounge settings.

**SPECIFICATIONS**

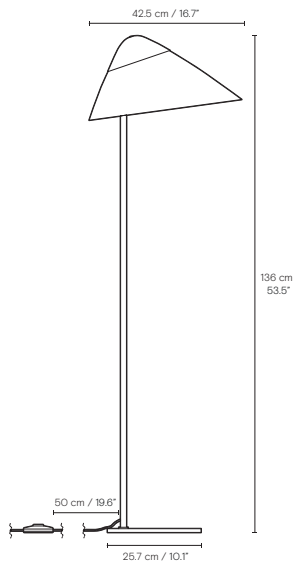







<b>Bulb</b>	<b>Dimmable function</b>	<b>Cord</b>	<b>Suspension</b>
Not included	None	2.5m black or white cord with in-line switch	Included

<b>Recommended light source</b>	<b>Socket</b>	<b>Max watt</b>	<b>Max voltage frequency</b>	<b>Electric shock protection</b>	<b>Ingress protection</b>
Phillips LED: A60 5W warm white	E27	13W	220-240V/50-60HZ	Class II	IP20

<b>Packaging dimensions and weight</b>	<b>Height</b>	<b>Width</b>	<b>Cbm</b>	<b>Net.</b>	<b>Tara</b>	<b>Gross</b>	<b>Cartons</b>
	230 mm	510 mm	0.06	5.1 kg	0.7 kg	5.8kg	1/2
	1500 mm	140 mm	0.03	1.4 kg	1.2 kg	2.6 kg	2/2


<b>Preassembled</b>	<b>Cleaning</b>
Partly	Use damp cloth

**MATERIALS**


- Top:  Black painted aluminium  White painted aluminium
- Base:  Black painted steel  White painted steel
- Shade:  Opal acrylic
- Rod:  Chrome

RECOMMENDED LIGHT SOURCE USED FOR MEASUREMENTS


Phillips LED  
 A60 5W E27 220-240V  
 Warm white  
 4,5W = 40W  
 470 lumen  
 2700K




POLAR

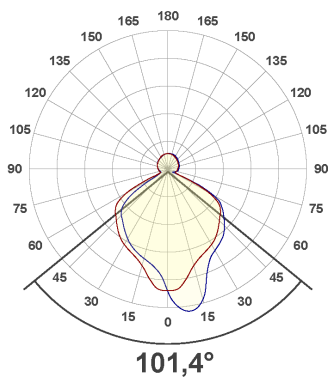

FOOTCANDLES

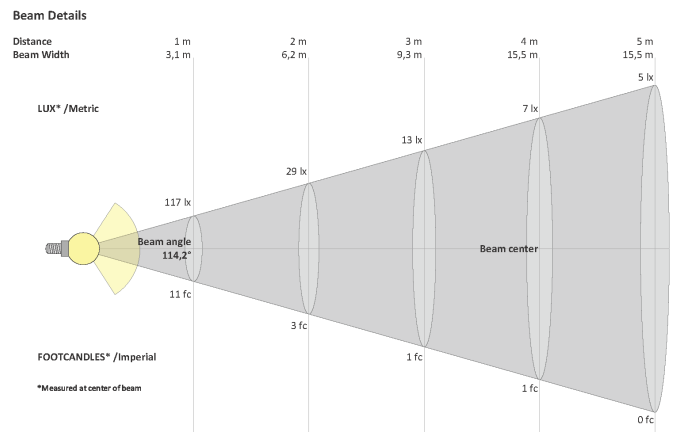


ISO-LUX

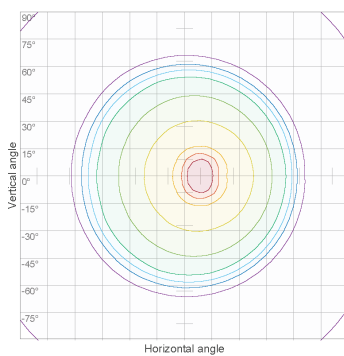

90 %	147,3 cd
80 %	131,0 cd
70 %	114,6 cd
60 %	98,2 cd
50 %	81,9 cd
40 %	65,5 cd
30 %	49,1 cd
20 %	32,7 cd
10 %	16,4 cd

Peak intensity: 163,7 cd  
 Number of c-planes: 24

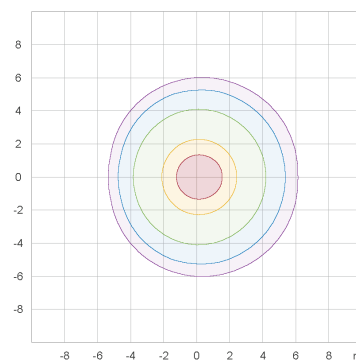

50.0 %	8,8 lx
30.0 %	5,3 lx
10.0 %	1,8 lx
5.0 %	0,9 lx
3.0 %	0,5 lx

Peak illuminance: 17,7 lx  
 Mounting height: 3,0 m  
 Number of c-planes: 24

