


LEAF TABLE LAMP – EU VERSION

BROBERG & RIDDERSTRÅLE ON THE DESIGN “The Leaf Table Lamp is inspired by the leaves of a tree, giving the design an organic and friendly appearance. The expression of the lamp changes according to the perspective of its viewer, transforming the shape into a graphic form. With an adjustable shade and dimmable light, the Leaf Table Lamp adds a quiet and refined touch to any space.”

15,5 x 18,5 cm
6"x7.25"



41,5 cm
16.32"

18 cm
7"



DESIGNED BY / YEAR OF DESIGN

Broberg & Ridderstråle / 2012

ABOUT THE DESIGNER

Broberg & Ridderstråle are Swedish design and architectural partners. Their work combines an aesthetic rationality with a touch of humour and wit. Mats Broberg and Johan Ridderstråle have both graduated from Konstfack University of design with honours and have been awarded the Swedish Art Council's working grant. Their work has successfully been exhibited in Tokyo, Milan and London.

CATEGORY

Table lamp

ENVIRONMENT

Indoor

DESCRIPTION

Leaf is a lamp series with an iconic silhouette in two sizes and a wide range of colors. Leaf uses energy-efficient LED technology and is equally suited for your private home as an office or commercial interior. The lamp's dim function makes it possible to control the light and mood in a room.

PRODUCTION PROCESS

Leaf is a result of a process combining turned and casted aluminum parts with a strong powder coating as paint.

MATERIAL

Aluminum, brass, colored PVC cord

CORD LENGTH

180 cm / 71"

BULB INCLUDED


Yes

DIMMABLE FUNCTION

Yes

CLEANING AND CARE

Wipe off dust with dry cloth. If necessary use moist cloth, then dry off. Do not use abrasive cleaning agents.

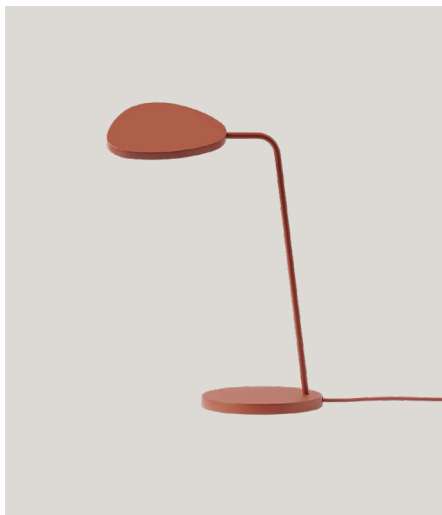


LEAF TABLE LAMP – EU VERSION



LAMP RATING

Voltage	110-240V
Frequency	50/60Hz
IP Rating	IP20
Classification	Class II
Socket	52 x non-replaceable LEDs (8W)

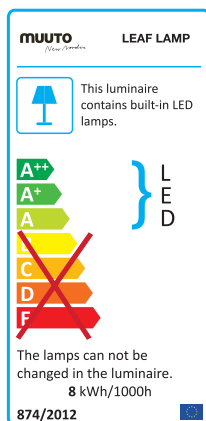

BULB SPECIFICATION

Item	52 x integrated, non-replacable LED
Watt	8W
Lumen	370 lm
Color temperature	3.000
Color consistency	3 McAdam steps
Lumen maintenance (70%)	54.000 h
CRI	>90
Dimmable	yes
Risk group	Except

GENERAL STANDARDS & CERTIFICATES

EU/UK	TAIWAN/JAPAN
CE-LVD	<u>Taiwan</u>
EN 60598-1:2014	BSMI
EN 60598-2-4:1997	CNS14115
EN 62471:2008	IEC60598/2/4
EN 62493:2015	CNS14335

Transformer CE/LVD	<u>Japan</u>
EN 61347-1:2015+A1:2013+A2:2015	PSE
EN 61347-2-13:2006	IEC 62471:2006

WEEE