

FLOS

■ F5600030 Black

Parentesi dimmer

Designed by Achille Castiglioni and Pio Manzu, 1971

Halogen - 150W



Lamp providing direct light. Lamp moves vertically via sliding of a painted or nickel-plated shaped steel tube on a ceiling-to-floor steel cable (4000 mm long). Fixture head made of injection-molded black elastomer. On the cable there is the electronic dimmer which allows the regulation of light brightness.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

EAN	8059607020456
Mounting	Suspension
Environments	Indoor dry location
Light source type	Bulb
Light sources included	No
Lamp category	Halogen
Lamp holders	E27
Icos	HSGSR
Number of lamps	1
Power (W)	150

Physical

Colour	Black
Length (mm)	110
Cord colour	Black
Cord length (mm)	4000
Canopy colour	Black
Canopy length/diameter (mm)	64
Canopy height (mm)	20
Net weight (kg)	3.7
Package height (mm)	90
Package width (mm)	150
Package length (mm)	610
Package volume (m3)	0.01
IP internal	20

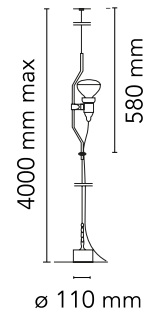

Download

Mounting instructions [↓ PDF](#)

Photometric Files

LDT / IES [↓ LDT](#)

Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)

[🔒 Bim](#) [↓ ZIP](#)



Schematic light drawing



h(m)	E(lx)	D(m)
1	156	4.37
2	39	8.75
3	17	13.12
4	10	17.50
5	6	21.87

Photometric

Lighting type	Direct
Light distribution	Symmetric
Extreme cut off	No

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Dimmable	Yes
Dimming interface	Dimmer Integrated
Plug type	Type C
Batteries inside	No

Accessories & Power Supply




OPTIONAL

F5700030

Parentesi dimmer Element


Bulbs



NOT INCLUDED

RF35355

LED Lamp 13W E27 220-240V
2700K R125




NOT INCLUDED

RF32366

LED Lamp 12W E27 220-240V
2700K R125

Spare Parts

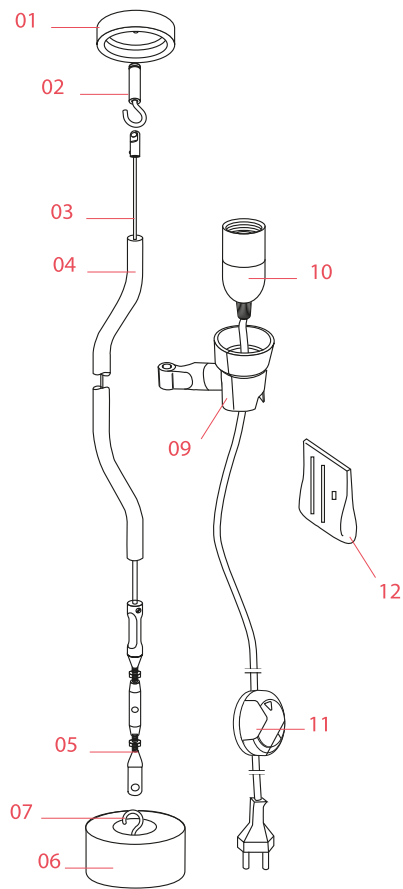

- | | | |
|-----|---|-----------|
| 01. | Parentesi Black ceiling rose assembly | RF5400130 |
| 02. | Anchor hook screw | RF06745 |
| 03. | Parentesi 4m steel cable | RF01442 |
| 03. | Parentesi 6m steel cable | RF01444 |
| 04. | Black tube | RF02600 |
| 05. | Parentesi inox turnbuckle & grub screw | RF01438 |
| 06. | Parentesi Base assembly new type | RF5601600 |
| 07. | Parentesi Hook and nut | RF06747 |
| 09. | Parentesi rubber support | RF35511 |
| 10. | Electric Wiring Assembly Led Rondò Dimmer | RF31753 |
| 11. | Led rondo' dimmer 220/240v 40-250w 4-100w | RF28045 |
| 12. | Kit wire ties and screw | RF5600200 |



RF5400130
Parentesi Black ceiling rose assembly



RF06745
Anchor hook screw



RF01442
Parentesi 4m steel cable



RF01444
Parentesi 6m steel cable



RF02600
Black tube



RF01438
Parentesi inox turnbuckle & grub screw



RF5601600
Parentesi Base assembly new type



RF06747
Parentesi Hook and nut type



RF35511

Parentesi rubber support



Electrical

RF31753

Electric Wiring Assembly Led
Rondò Dimmer



RF28045

Led rondo' dimmer 220/240v 40-
250w 4-100w



RF5600200

Kit wire ties and screw